



USING 0.6MM VENEERS TO PROVIDE AN ECONOMICAL SOLUTION WITHOUT SACRIFICING QUALITY



## SPECIFICATIONS

SPECIES	Sydney Blue Gum, Spotted Gum, Jarrah, Grey Ironbark, Blackbutt, Brush Box
VENEER	0.6mm face veneer nominal thickness
SUBSTRATE	Cross-laminated plantation Eucalyptus
SIZES	1830 x 136 x 14/0.6mm, 1830 x 186 x 14/0.6mm
CLICK	Patented Välinge click locking system
FINISH	13 Coats, UV cured, high dent and scratch resistance, micro-bevelled
WARRANTY	25 year domestic or 10 year commercial warranty
STANDARDS	Manufactured to meet globally recognised standards: ASTM D-2394; ASTM D-3359 and ASTM D-4060
PACKING	136mm wide – 6 pieces covering 1.493m <sup>2</sup> per carton. 77 cartons or 114.982m <sup>2</sup> per pallet 186mm wide – 6 pieces covering 2.042m <sup>2</sup> per carton. 55 cartons or 112.325m <sup>2</sup> per pallet

## CARE AND MAINTENANCE

Proper care and maintenance will help to keep your **envirofloor** looking as new as possible.

### PROTECTION

Use normal timber floor protection such as floor rugs and doormats to avoid wear damage and scratches to your new **envirofloor**.

### CLEANING

Sweeping and mopping with diluted flooring cleaner is recommended.

### MOP ON COATING MAINTENANCE

A water based sacrificial coating product, such as Loba ParkettCare, is highly recommended from time to time after cleaning to remove minor damage caused by daily foot traffic. This will protect the surface, enhance the appearance and extend the life of your **envirofloor**.

### RE-SANDING AND RE-COATING

Due to its specially designed structure and high stability, **envirofloor** will retain a flat surface for its lifetime. Should re-coating be required, use a buffing pad to rough up existing coating on all **envirofloor** ranges.

Fine grit sanding paper can be used on **envirofloor136** and **envirofloor186** to remove existing coating. Always seek advice from your supplier about the most appropriate re-coating process.

[www.envirofloor.com.au](http://www.envirofloor.com.au)



# envirofloor

A NEW GENERATION OF AUSTRALIAN HARDWOOD ENGINEERED FLOORING

25 YEAR DOMESTIC WARRANTY  
SPECIALTY AUSTRALIAN HARDWOOD VENEERS  
14 LAYER 'PLATINUM' COATING  
PLANTATION EUCALYPTUS CORE  
CHAIN OF CUSTODY

# envirofloor

## A NEW GENERATION OF ENGINEERED FLOORING THAT HONOURS THE BEAUTY AND ELEGANCE OF AUSTRALIAN HARDWOOD

### INCREASED STABILITY IN STRUCTURE AND VENEER

These new generation Australian hardwood veneers offer supreme quality, and when they are combined with a specially designed substrate, the traditional concerns with surface checking, cupping and expansion are removed.

### WIDER BOARDS


envirofloor comes in 2 widths; **envirofloor136** is the standard width of 136mm and the new **envirofloor186** range is 186mm in width presenting the full beauty and elegance of Australian hardwood.

### TOUGHER SURFACE COATING

A new 'Platinum Coating Technology' takes scratch and dent resistance to a higher level.



## CLASSIC AUSTRALIAN TIMBERS

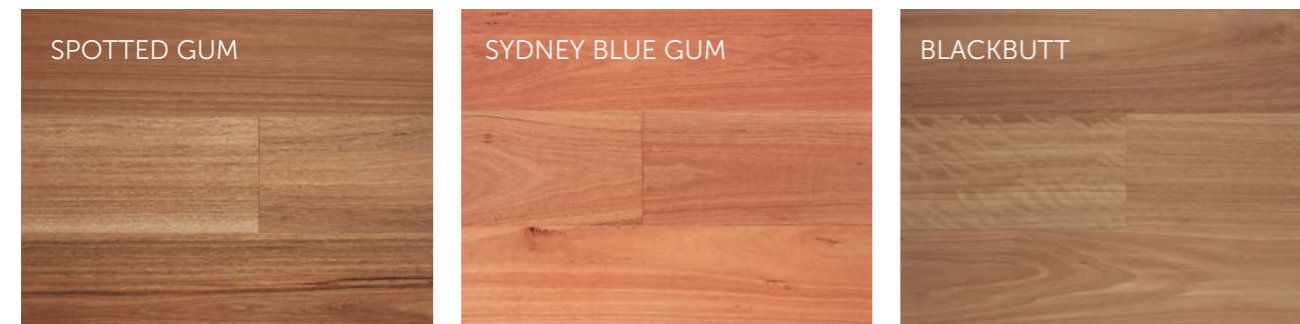

## FEATURES...

<p><b>25 YEAR DOMESTIC WARRANTY</b></p>	<p><b>SPECIALTY AUSTRALIAN HARDWOOD VENEERS</b></p>	<p><b>14 LAYER 'PLATINUM' COATING</b></p>	<p><b>ULTRA-STABLE PLANTATION EUCALYPTUS CORE</b></p>	<p><b>LOW EMISSIONS &amp; HIGH AIR QUALITY</b></p>
<p>envirofloor carries a 25 year domestic, or 10 year commercial warranty on surface wear under normal conditions</p>	<p>envirofloor's 2mm face veneers are de-stressed which greatly improves stability, and reduces the risk of surface cracking, cupping and warping</p>	<p>envirofloor's state of the art, 14 layer 'Platinum' coating system is dent and scratch resistant, delivering proven, market-leading performance</p>	<p>All materials used in the manufacture of <b>envirofloor</b> are sourced from sustainable forests and come with Chain of Custody</p>	<p>envirofloor is certified for low chemical emissions and high indoor air quality</p>

## STATE OF THE ART MANUFACTURING

### NEW GENERATION AUSTRALIAN HARDWOOD VENEER



## SPECIFICATIONS

SPECIES	Spotted Gum; Blackbutt; Sydney Blue Gum
VENEER	2mm face veneer nominal thickness
SUBSTRATE	Cross-laminated plantation Eucalyptus
SIZES	1830x136x15/2mm, 1830x186x15/2mm
CLICK	Patented Välinge click locking system
FINISH	14 Coats, UV cured, high dent and scratch resistance, micro-bevelled
WARRANTY	25 year domestic or 10 year commercial warranty
STANDARDS	Manufactured to meet globally recognised standards: ASTM D-2394; ASTM D-3359 and ASTM D-4060
PACKING	136mm wide – 6 pieces covering 1.493m <sup>2</sup> per carton. 70 cartons or 104.529m <sup>2</sup> per pallet 186mm wide – 6 pieces covering 2.042m <sup>2</sup> per carton. 50 cartons or 102.114m <sup>2</sup> per pallet